


ITEM NO.	QTY. REQD	DWG. NO. PART NO.	DESCRIPTION
1	1	721-24	Parker Hydraulic Hose – No Skive 1.5”
2	1	11971-24-24	Parker SAE Flanged Connection – 90° Elbow 1.5” X 1.5”
3	1	11771-24-24	Parker SAE Flanged Connection – 45° Elbow 1.5” X 1.5”

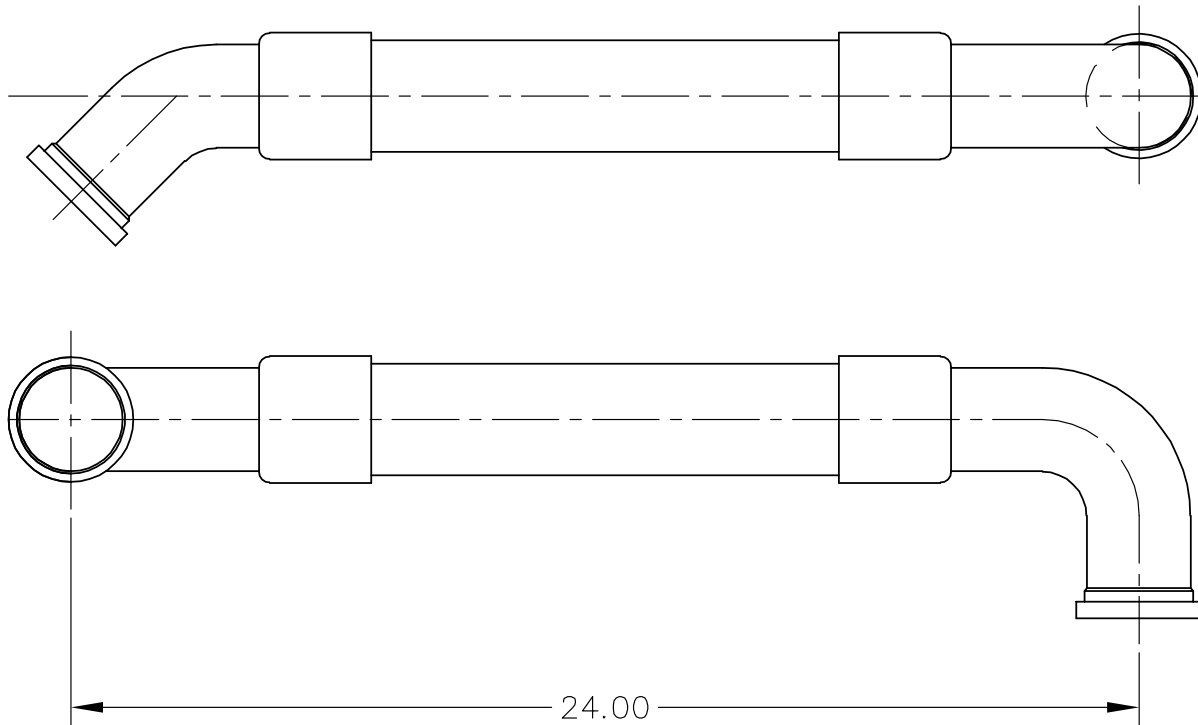


HOSE ASS'Y NO.: 721-17-19-24-24-24-24.0-270

MANUFACTURER: PARKER FLUID CONNECTORS

WORKING PRESSURE: 2500 PSI

BURST PRESSURE: 10,000 PSI

NO.	REVISIONS		BY	DATE	CK.
MAT'L	FIN. WT.				
<small>This document and all information and design thereon are the property of Metso Industries, Inc., York, PA. This document is confidential and must not be made public or copied without prior written authorization from Metso and is subject to return upon demand. No use of this document or any information or designs thereon is permitted except as is specifically authorized in writing by Metso. Acceptance of possession of this document constitutes full agreement with the above conditions. Copyright © Metso Industries, Inc., 2002.</small>			 <p>Metso Minerals Industries, Inc. 240 Arch St., P.O. Box 15312 York, PA 17405-7312 USA</p>		
-PERMISSIBLE TOLERANCES FOR NON-LIMITED DIMENSIONS- -ALL TOLERANCES ARE NON-CUMULATIVE-			HOSE ASSEMBLY 1.5" I.D. HOSE X 24.0" LG PARKER		
FABRICATION AND CASTING DIMENSIONS		MACHINING DIMENSIONS		DR. ecb	DT. 04/10/2007
ALL DIMENSIONS IN INCHES .X = ± 0.25" .XX = ± 0.12" .XXX = ± 0.062" ANGULAR = ± 2 DEGREES CHAMFER = ± 4 DEGREES		ALL DIMENSIONS IN INCHES .X = ± 0.06" .XX = ± 0.03" .XXX = ± 0.015" ANGULAR = ± 0°-15' MACHINE SURFACE FINISH 250 RMS - UNLESS NOTED		CK. ECB	DT. 04/11/2007
				APP.	SC. NTS
				A	04-138532