

## Table of contents

<b>Magnetic switches – General features</b>		<b>Page 195</b>
<b>Electromechanical magnetic switches</b>	Page 196	<b>Electronical magnetic switches</b>
- Selection aid cylindrical and metric housing	Page 198	- Selection aid cylindrical and rectangular housings
- Selection aid rectangular housing	Page 201	Page 205

Overview


### Electromechanical magnetic switches

Cylindrical and metric housings



Page 199

Rectangular housings

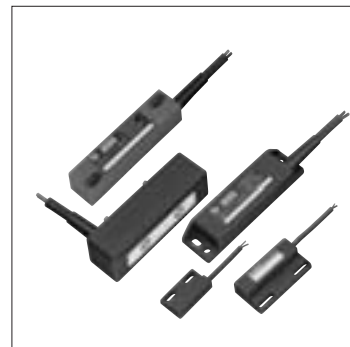

Page 202

Overview

### Electronic magnetic switches

Cylindrical and metric housings



Page 206

Rectangular housings



Page 207

## Magnets

Page 210

Accessories

- Overview magnets

Page 210

- Mounting brackets

Page 215

- Connecteurs

Page 215

Output diagrams

Page 203

Dimension diagrams/Magnetic switches

Page 208

Model code

Page 276

Wiring diagrams

Page 278

# Magnetic switches – General features

## Electromechanical and electronic models

BERNSTEIN has extended its range of electromechanical magnetic switches with electronic versions which operate according to the Hall and magnetoresistive principle.

Electromechanical and electronic magnetic switches have special properties which ensure optimal use in their respective environments.

The electronic versions are characterised by their improved mechanical characteristics (high resistance to vibration, shock or impact) and are absolutely wear-free.

The traditional electromechanical magnetic switches have a very high operational reliability thanks to the use of only one single "active" component (reed contact). The multi-voltage capability and low procurement costs allow these switches to be used in a wide range of applications.

The matrix below highlights the main features for each principle of function and helps you to decide on which magnetic switch to use for your application.



### Technical features and fields of use

More detailed information about the technical features and fields of use for the two principles of function is available in the following chapters.

